

H8c PoE 2K

Pan & Tilt PoE IP Camera

360° coverage, reliable connection

Designed to increase home security in an easy but professional manner, the H8c PoE greatly reduces the hassle by combining wired network and power supply on one cable, simplifies long-term maintenance, and offers much better scalability and lower installation costs compared to traditional options. Its motorized lens rotates to capture a 360-degree panoramic view in vivid 2K quality, leaving no blind spot in sight. It also detects and tracks moving people, and deters them effectively thanks to its built-in AI and active defense feature.



Power Over Ethernet



2K Resolution



Panoramic View







Two-Way Talk



Color Night Vision



Smart Integration with Google Assistant



H.265 Video Technology³







360° plus 2K, for far less blind spots

A bigger space needs a wider view, and that's where the H8c PoE comes in handy. It can pan and tilt to take in a 360-degree field-of-view, and render details in 2K resolution to capture crucial moments clearly.



One cable to connect and provide power

As reliable as its conventional equivalents, the H8c PoE is meant for easy installation with fewer cables and hardware components required. It connects stably to the network, draws power and transmits high-quality video, all over a single Ethernet cable.



Non-stop Power Delivering Stable Network





Cost-effective Installation







A smart eye that locks on and follows

When a human motion is detected, the H8c PoE will automatically rotate to track its movement and record the activity. When in action, it makes it hard for your loved ones to stay out of sight.



H8c PoE Camera

AI-Powered Human **Shape Detection**



Auto - Tracking



Customizable **Detection Zone**




FREE No Subscription Fee

Ethernet Port



One click return to the preset location


No matter how complicated the tracking is, the camera always knows it's way back to your preferred viewing angle. You can pinpoint up to 12 angles via the EZVIZ App. Just click on your pre-set dots and the camera will automatically resume its place.




Front Door




Garage



Front Yard

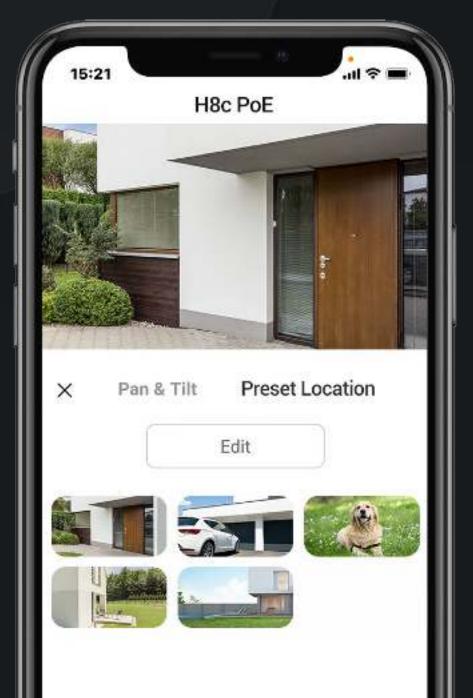




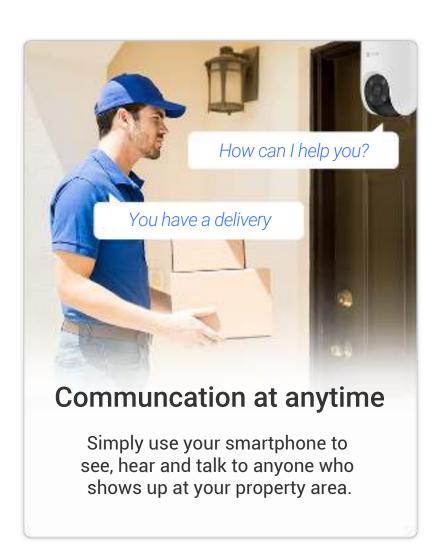







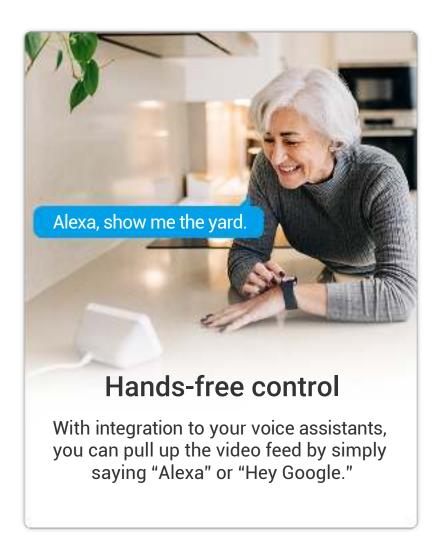





- 1 The spotlights will not flash when the color night vision mode is enabled.
- 2 Google Assistant is not available in certain languages and countries.
- 3 Data from EZVIZ Lab's test results under standard conditions. Will vary with the frequency and complexity of the activity captured, and other environmental factors.
- 4 A local storage card must be purchased separately. The cloud storage service is only available in certain markets. Please verify the availability before making a purchase.

Specifications Model CS-H8c PoE (2K)

Camera

Image sensor 1/2.8" Progressive Scan CMOS

Shutter Speed Self-adaptive shutter

Lens 4mm@ F1.6, viewing angle: 49° (Vertica),

89° (Horizontal), 104° (Diagonal)

6mm@ F1.6, viewing angle:28° (Vertica),

52° (Horizontal), 60° (Diagonal)

PT Angle Pan: 350°, Tilt: 80°

Minimum Illumination 0.5 Lux @(F1.6, AGC ON), 0 Lux with IR

(* data is obtained from EZVIZ laboratories)

Lens Mount M12

Day & Night IR-cut filter with auto switch

DNR 3D DNR

WDR Digital WDR

Black & White Night

Vision

30m / 98ft

Video & Audio

Max. Resolution 2304 × 1296

Frame Rate Max:30fps; Self-Adaptive during network transmission

Video Compression H.265 / H.264

H.265 Type Main Profile

Video Bit Rate Ultra-HD; Hi-Def; Standard. Adaptive bit rate.

Audio Bit Rate Self-Adaptive

Network

Protocol EZVIZ cloud proprietary protocol
Interface Protocol EZVIZ cloud proprietary protocol

Wired Network RJ45 \times 1(10M/100M Adaptive Ethernet Port)

Function

Smart Alarm Al-Powered Human Shape Detection

Auto Tracking Supports

Customized Alert Area Supports

Two-way Talk Supports

Preset Locations Supports

General Function Anti-Flicker, Dual-Stream, Heart Beat, Password

Protection, Watermark

Storage

Local Storage Supports microSD card storage (Up to 512GB)

Cloud Storage EZVIZ CloudPlay Storage

General

Operating Conditions -30°C to 50°C (-22 °F to 122 °F)

humidity 95% or less (non-condensing)

IP Grade Weatherproof Design

Power Supply DC 12V/1A, Supports PoE power supply

Power Consumption MAX. 12W

Dimensions $100 \times 136 \times 140 \text{ mm} (3.94 \times 5.35 \times 5.51 \text{ inch})$

Packaging Dimensions $140 \times 140 \times 192 \text{ mm} (5.51 \times 5.51 \times 7.56 \text{ inch})$

Weight Net Weight: 525g

With Package: 745g For EU Standard Version

In the box

- H8c PoE (2K) Camera
- Drill Template
- Screw Kit
- Waterproof Kit
- Regulatory Information
- Quick Start Guide

Certifications

CE / UL / RoHS / WEEE / REACH